

# TANAIR


## SMALL BORE ISO CYLINDERS

### ORDERING GUIDE

### HOW TO ORDER



### CODE NUMBER FOR MOUNTING ACCESSORIES

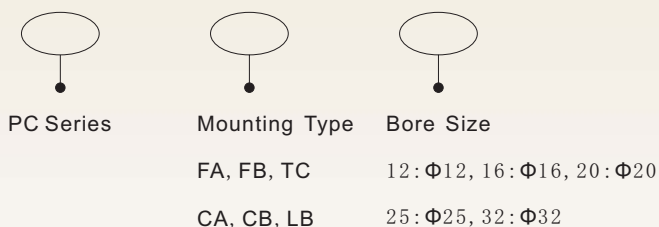

# TANAIR

## SMALL BORE ISO CYLINDERS

### ● STROKE TABLE

Bore size	Available stroke (mm)
φ 12-Single acting	15, 25, 50
φ 12-Double acting	15, 25, 50, 75, 100, 125, 150
φ 16-Single acting	15, 25, 50
φ 16-Double acting	15, 25, 50, 75, 100, 125, 150
φ 20-Single acting	25, 50
φ 20-Double acting	25, 50, 75, 100, 125, 150, 200
φ 25-Single acting	25, 50
φ 25-Double acting	25, 50, 75, 100, 125, 150, 200, 250, 300
φ 32-Single acting	25, 50
φ 32-Double acting	25, 50, 75, 100, 125, 150, 200, 250, 300, 400, 500
φ 40-Single acting	25, 50
φ 40-Double acting	25, 50, 75, 100, 125, 150, 200, 250, 300, 400, 500

Aboves are standard stroke, non-standard on request.

### ● SPECIFICATION

Bore Size	φ 12	φ 16	φ 20	φ 25	φ 32	φ 40
Port Size	M5 X 0.8 1/8"					
Fluid	Compressed Air					
Operating	Double Acting, or Single Acting					
Cushion	Can Be Adjusted Per Your Demand					
Operation Pressure	1. 5-8. 5kgf/cm <sup>2</sup>					
Max. pressure	9. 5kgf/cm <sup>2</sup>					
Tubing Material	Aluminum Alloy					
Magnets	Built-in					
Operating Temperture	0 °C - 60 °C					
Piston Speed	50-700mm/sec.					

### ● FEATURES :

- Identical with ISO6432 12-25  
Adjustable cushion at both ends absorbing high speed impact provides stable movement and non-vibration
- Built-in permanent magnets for sensors use.
- Caps are rolled and polished precisely ensures a smooth, stable movement and long service life.
- Stainless steel SUS304 boby material provides excellent resistant against corrosion and strong mechanically strength.

website: [www.easternpneumatics.com](http://www.easternpneumatics.com)